


toolfix

S a e f t y

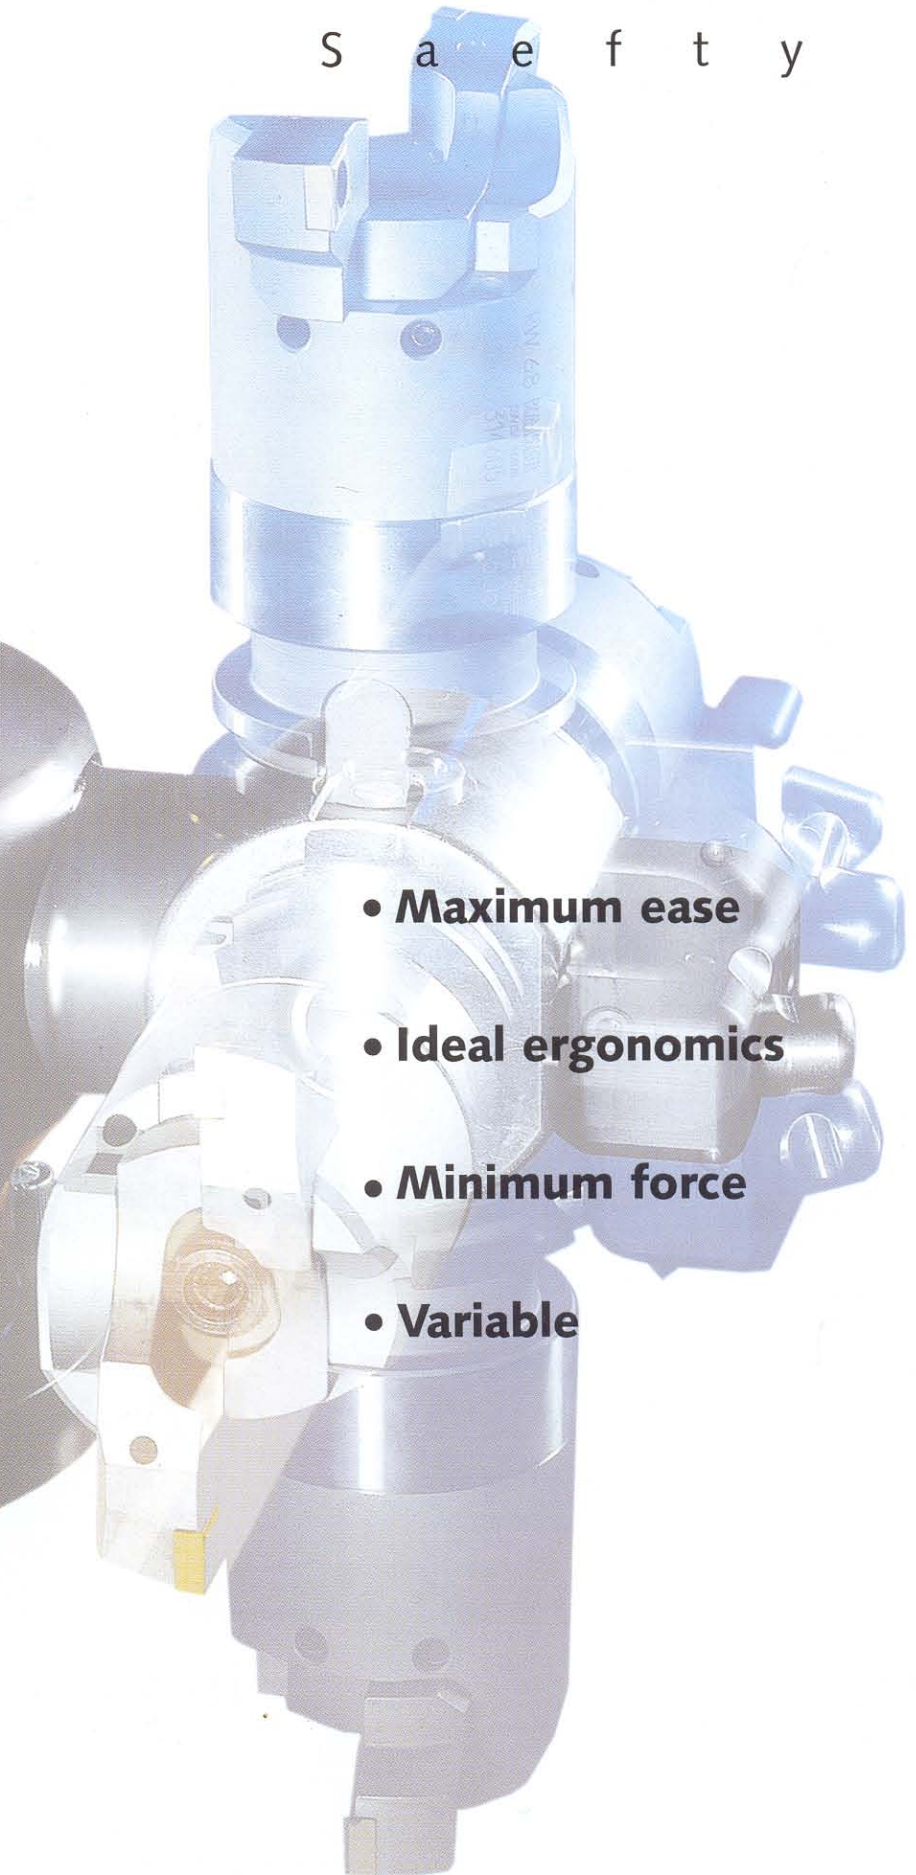

- **Maximum ease**
- **Ideal ergonomics**
- **Minimum force**
- **Variable**

toolfix

- Modular Assembly-Tool for all current tool-shafts.
- Maximum ease of operation, automatic clamping system.
- Ideal ergonomics through 45 degree adapter division with automatic locking.
- Minimum force applied with major torques.
- Adjustable to a variety of tool types.
- Low space requirement.
- Maximum safety for operator and tool.
- A must for the modern assembly shop.
- Amortised in minimum time.
- By request also special types.

toolfix Swivel Function:

The tool can be swivelled into the ideal set-up position by pressure on the locking bolt.

The tool can have eight 45-degree divisions. Division locking is carried out automatically.

The TOOLFIX unit can be fastened to a work-bench or tool cabinet at the top or bottom.

toolfix Tool Adaptor:

The tool is automatically secured when placed in the adaptor. The clamping fingers can be adjusted to suit the given type of tool and function. (MAS-BT/ANSI/DIN). Only a withdrawal of the bolt will release the tool.

toolfix Adaptor types:

The following types are standard:

| | | |
|--------|--------|--------------|
| ISO 20 | VDI 16 | HSK 32 |
| ISO 25 | VDI 20 | HSK 40 |
| ISO 30 | VDI 25 | HSK 50 |
| ISO 35 | VDI 30 | HSK 63 |
| ISO 40 | VDI 40 | HSK 80 |
| ISO 45 | VDI 50 | HSK 100 |
| ISO 50 | VDI 60 | (Form A - E) |
| ISO 60 | VDI 80 | |

Also available are manufacturer-specified adaptors like Capto, KennaMetal, Komet ABS and many more

toolfix Mono & Vario:

MONO is a assembly tool with fixed tool adaptors



VARIO is a assembly tool with fast-change-lock for changing the different adaptor types.



toolfix Adaptor:

For the ideal cutter / tool-access position the adaptor can be turned as well as swivelled. (Division 12x30°).

Standard versions:

| | |
|--------|---------|
| ISO 40 | HSK 63 |
| ISO 50 | HSK 100 |

PCM
TOOLING (UK) LTD.

825 THE RIDGE
ST. LEONARDS-ON-SEA
EAST SUSSEX TN37 7PX

TEL NO: 01424-753174 FAX NO: 01424-753089

innotool
austria

Gerätebau GmbH
Oberhub 11
A-6844 Alttach

t 05576 79040 - f 05576 79041
office@innotool-austria.com
www.innotool-austria.com

